


9.2.21b Regelventile

Einbaumasse

GE

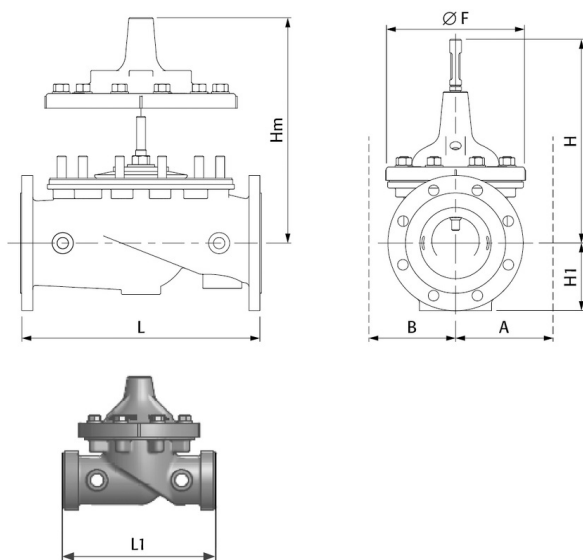

Bauform GE

Gerade Bauform mit grossem Sitzdurchmesser ergibt einen grossen KV_S -Wert für grosse Durchflussmengen bei gleichem Flanschanschluss wie die entsprechende Bauform NGE.

Flansch	L	Hm	Ø F	H	H1 PN10-16	H1 PN25	A	B	kg
DN32	215	252	145	191	-	-	150	100	13
DN40	215	252	145	191	75.0	75.0	150	100	13
DN50	254	285	170	215	82.5	82.5	150	100	20
DN65	280	320	205	245	93.0	93.0	165	115	25
DN80	305	345	235	260	100.0	100.0	203	127	30
DN100	381	450	295	345	110.0	117.5	216	152	50
DN150	508	540	400	415	142.5	150.0	230	205	95
DN200	645	645	510	495	170.0	180.0	285	260	170
DN250	756	780	600	595	-	-	330	305	310
DN300	864	905	712	695	-	-	370	362	470
DN400	1051	1120	900	850	-	-	475	450	970



Innengewinde	L1	Hm	Ø F	H	H1 PN10-16	H1 PN25	A	B	kg
1"	130	190	115	135	-	-	125	65	6
1 1/4"	184.5	252	145	191	-	-	150	100	13
1 1/2"	184.5	252	145	191	75.0	75.0	150	100	13
2"	238	285	170	215	82.5	82.5	150	100	20
2 1/2"	280	320	205	245	93.0	93.0	165	115	25
3"	318	345	235	260	100.0	100.0	203	127	30

Alle Masse in mm - Änderungen vorbehalten